




AXIS
PORTABLE AIR

DUAL FUEL CONSTRUCTION HEATERS

FLAGRO F1500T

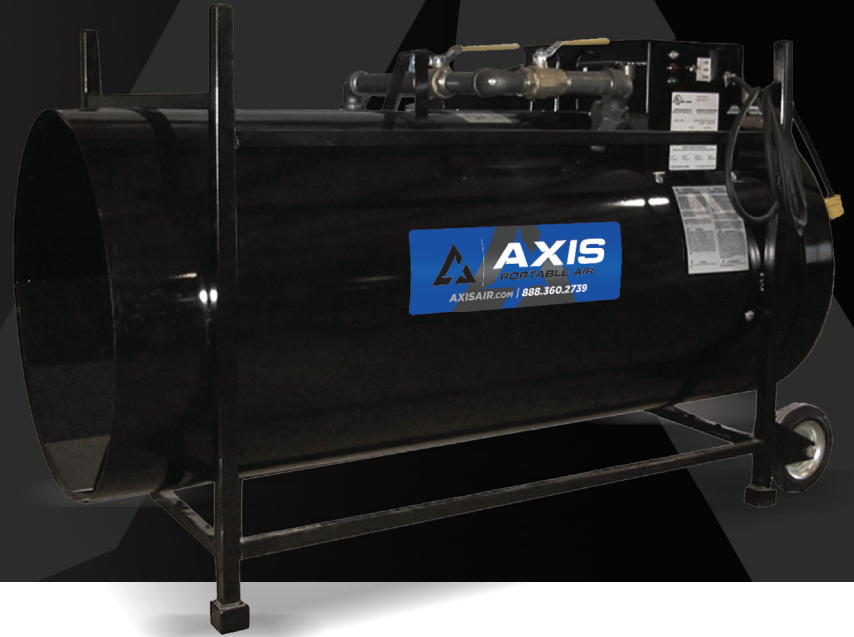

SPECIFICATIONS

FUEL	Propane or Natural Gas
BTU/HR	1,500,000 btuh
LOW FIRE BTU/HR	650,000 btuh
FUEL CONSUMPTION PROPANE NATURAL GAS	69 lbs/hr 1428 CFH
INLET PRESSURE PROPANE NATURAL GAS	11" W.C. Max, 10" W.C. Min
POWER REQUIREMENT	115 V/60 Hz/1 PH/20 Amp
FAN MOTOR	1 HP
AIR CIRCULATION	7,000 CFM
IGNITION	Direct Spark Control
THERMOSTAT CONTROL	Yes
L X W X H	61" x 29" x 38"
AIR OUTLET	26" Diameter
WEIGHT	360 lbs

Required equipment for heater installation:

SECOND STAGE REGULATOR
B31R1.25 (1-1/4" NPT)

TYPICAL HOSE ASSEMBLY
S54180-20 - 1 1/4" x 15 ft Hose Assembly



Ventless regulator
available on request.



AXISAIR.com | 888.360.2739



AXIS
PORTABLE AIR